



## CM5019-2pad

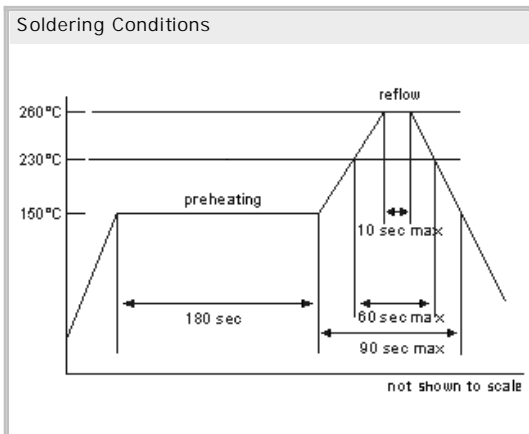

### Quartz Crystal Unit CM5019-2pad

- SMD in ceramic case (5.0 x 1.9 x 0.9) mm
- on Tape & Reel
- RoHS conform; Lead-free product
- Available in many standard and special frequencies

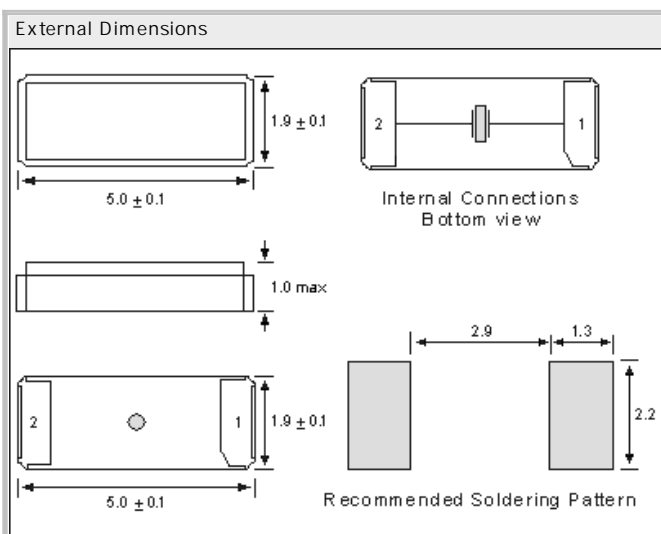

## Specifications

Holder Type:	CM5019-2pad
Frequency Range:	32.768 kHz
Frequency Stability at 25°C:	± 20 ppm
Temperature Stability:	± 20 ppm @ -40°C to +85°C
Storage Temperature:	-55°C to +125°C
Drive Level:	0.1µW max.
Load Capacitance (CL):	9pF, 12.5pF
Shunt Capacitance (CO):	< 1pF typ.
Equivalent Series Resistance:	R = 70 kOhm max.
Aging:	< ± 3ppm max. / year (max.)

### GERMANY:

COMTEC CRYSTALS GmbH · Sultenstrasse 12-14  
 8 5 5 8 6 P o i n g / G E R M A N Y  
 Phone +49 8121 778160 · Fax +49 8121 778177  
 e-Mail [info@comtec-crystals.com](mailto:info@comtec-crystals.com)  
 Internet: <http://www.comtec-crystals.com>  
 Subject to change without prior notice.



Technical Data and Graphics are all under  
 Copyright (c) of Comtec Crystals Group.

### FRANCE:

COMTEC CRYSTALS SARL · 23, rue du Faucon  
 6 7 5 0 0 H a g u e n a u / F R A N C E  
 Phone +33 388 732162 · Fax +33 388 730118  
 e-Mail [sales@comtec-crystals.com](mailto:sales@comtec-crystals.com)  
 Internet: <http://www.comtec-crystals.com>  
 Sous réserve de modifications.