



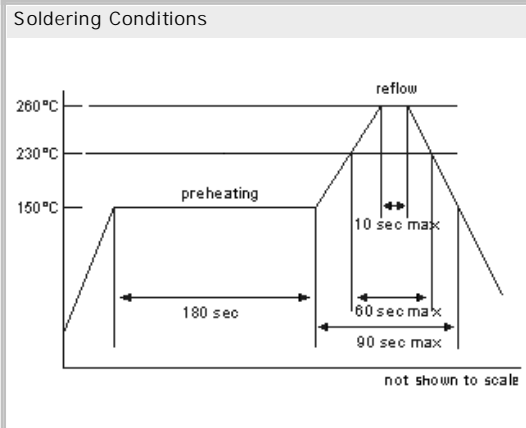

## Quartz Crystal Unit MA406

- Standard Quartz Crystal SMD with 4 pads
- Plastic Package
- on Tape & Reel
- Available in many standard and special frequencies
- RoHS conform; Lead-free product

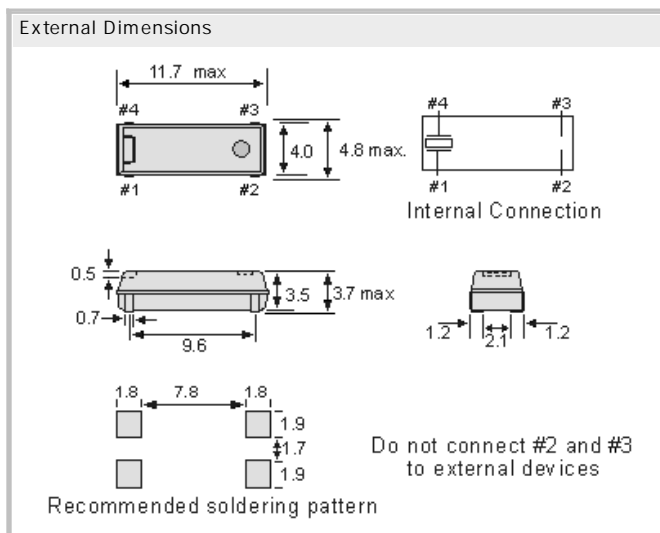

## Specifications

Holder Type:	MA406 with 4 pads
Frequency Range:	4.000 to 29.999 MHz (fun.) 30.000 to 64.000 MHz (3rd)
Frequency Stability at 25°C:	± 30 to ± 50 ppm
Temperature Stability:	± 50 ppm @ -20°C to +70°C ± 50 ppm @ -40°C to +85°C
Storage Temperature:	-55°C to +125°C
Drive Level:	100µW max.
Load Capacitance (CL):	5pF to 32pF, series (00)
Shunt Capacitance (CO):	< 5pF
Crystal Cut & Vibration Mode:	AT-cut, fundamental; - 3rd overtone
Equivalent Series Resistance:	R = 50 Ohm (fun.) - 150 Ohm max.
Moisture sensitivity level:	MSL= 1 per IPC/JEDEC J-STD-020 C
Aging:	< ± 5ppm max. / year (max.)

### GERMANY:

COMTEC CRYSTALS GmbH · Sultenstrasse 12-14  
8 5 5 8 6 P o i n g / G E R M A N Y  
Phone +49 8121 778160 · Fax +49 8121 778177  
e-Mail [info@comtec-crystals.com](mailto:info@comtec-crystals.com)  
Internet: <http://www.comtec-crystals.com>  
Subject to change without prior notice.



Technical Data and Graphics are all under  
Copyright (c) of Comtec Crystals Group.

### FRANCE:

COMTEC CRYSTALS SARL · 23, rue du Faucon  
6 7 5 0 0 H a g u e n a u / F R A N C E  
Phone +33 388 732162 · Fax +33 388 730118  
e-Mail [sales@comtec-crystals.com](mailto:sales@comtec-crystals.com)  
Internet: <http://www.comtec-crystals.com>  
Sous réserve de modifications.