



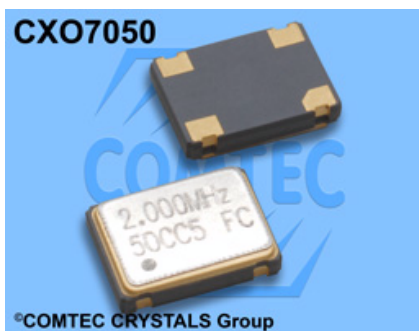


Clock Oscillator True Sine Wave CXO7050SR5.0 5.0V

- SMD in ceramic case (7.0 x 5.0 x 1.7) mm
- No Tri-State option
- True Sine Wave
- on Tape & Reel (Tape 16mm)
- RoHS conform; Lead-free product
- Vibration: MIL-STD-202F method 204, 35G, 50 to 2000 Hz
- Shock: MIL-STD-202F method 213B, test cond. E, 1000GG 1/2 sine wave
- Available in many standard and special frequencies

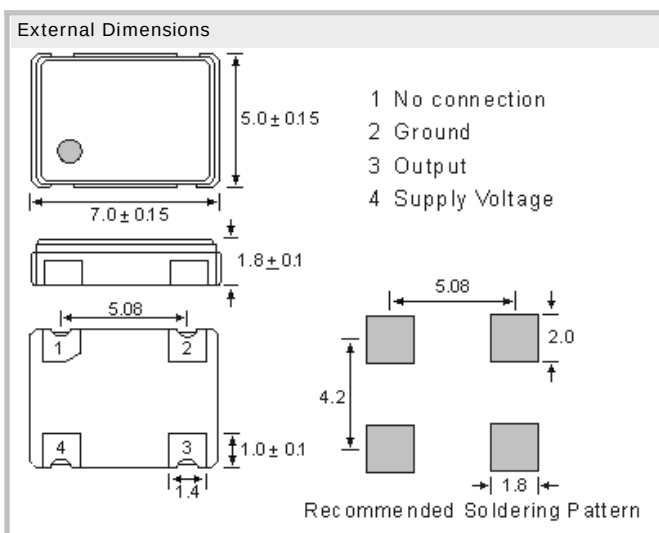

True Sine Wave

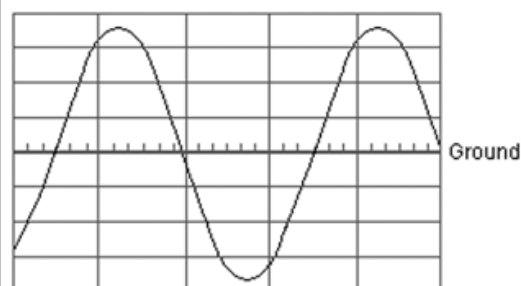

Specifications - Product No. G025000000FPSVPN11AU

Holder Type:	CXO7050SR5.0 5.0V (Voltage code is " 5.0 ")
Frequency:	25.000000 MHz
Frequency Stability at 25°C:	± 25.0 ppm
Operating Temperature Range:	± 25.0 ppm ; ±0°C to +60°C (inclusive of 25°C tolerance, ±10% input voltage variation, load change, aging, shock and vibration)
Storage Temperature:	-55°C to +125°C
Power Supply Voltage (Vdd):	+ 5.0V D.C. ± 10%
Maximum Supply Current:	1.2 mA
Load:	10 kOhm //10pF load
Output Wave Form:	True Sine Wave
Output Level:	1.0V p-p typical
Harmonics:	<-25dBc (frequency dependent)
Sub-Harmonics:	None
Start Up Time:	2.0 ms typical
Tri-state Function Pin 1:	No Tri-State option
Aging:	< ±5ppm max. / year (max.)
Reflow Condition:	260°C max. for 10 sec.

GERMANY:

COMTEC CRYSTALS GmbH · Sultenstrasse 12-14
 85586 Poing / GERMANY
 Phone +49 8121 778160 · Fax +49 8121 778177
 e-Mail info@comtec-crystals.com
 Internet: <http://www.comtec-crystals.com>
 Subject to change without prior notice.



Technical Data and Graphics are all under
 Copyright (c) of Comtec Crystals Group.

FRANCE:

COMTEC CRYSTALS SARL · 23, rue du Faucon
 67500 Haguenau / FRANCE
 Phone +33 388 732162 · Fax +33 388 730118
 e-Mail sales@comtec-crystals.com
 Internet: <http://www.comtec-crystals.com>
 Sous réserve de modifications.