
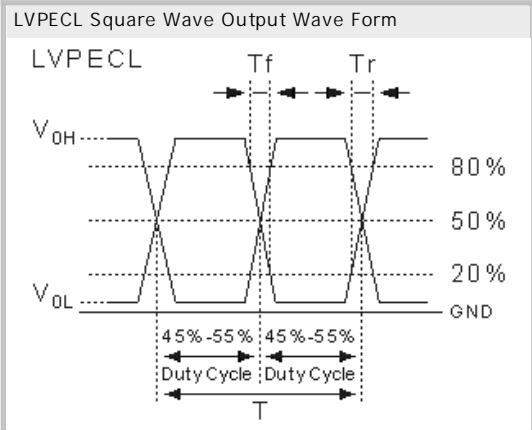


Differential LVPECL Clock Oscillator
CXO7050PK3.3, 3.3V, 200 fsec Jitter

- SMD in ceramic case (7.0 x 5.0 x 1.8) mm
- Tri-State Enable / Disable on pad No. 1
- Femto second integrated phase jitter (200 fs typical, 12 KHz to 20 MHz)
- Superior phase noise (-138 dBc/Hz at 10 KHz and -144 dBc/Hz at 100 KHz offset)
- RoHS conform; Lead-free product; on Tape (16mm) & Reel
- Vibration: MIL-STD-202F method 204, 35G, 50 to 2000 Hz
- Shock: MIL-STD-202F method 213B, test cond. E, 1000GG 1/2 sine wave
- High performance with surprisingly low price

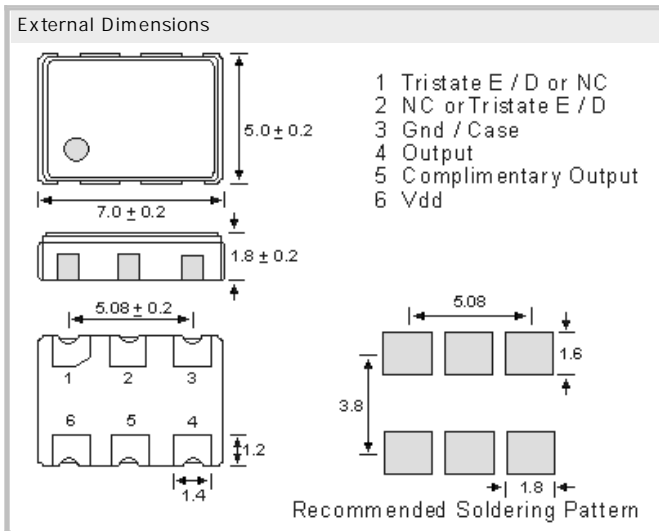

Specifications

| | |
|-------------------------------------|---|
| Holder Type: | CXO7050PK3.3; 3.3V(Voltage code is "3.3"); Tri-State on pad 1 |
| Frequency: | 166.670000 MHz |
| Frequency Stability at 25°C: | ± 50.0 ppm |
| Operating Temperature Range: | ± 50.0 ppm over -10°C to +70°C (inclusive of 25°C tolerance, ±10% input voltage variation, load change, aging, shock and vibration) |
| Storage Temperature: | -55°C to +150°C |
| Power Supply Voltage (Vdd): | + 3.3V D.C. ± 5% |
| Maximum Supply Current (15pF load): | 30.0 mA typ. |
| Output Swing: | 595 mV min; 750 mV typical; 930 mV max. |
| Output Logic Levels: | High "1" Voh Vdd-1.025V min., Vdd-0.95 V typical; Vdd-0.88V max. Condition: RL= 50 Ohm to (Vdd-2.0V) Low "0" VoL Vdd-1.810V min., Vdd-1.70 V typical; Vdd-1.62V max. Condition: RL= 50 Ohm to (Vdd-2.0V) |
| Output Symmetry (Duty Cycle): | 50% ± 5% max. measured at 50% waveform |
| Load: | RL= 50 Ohm into (Vdd-2.0V) or Thevenin equivalent (terminating resistors required on all outputs). |
| Rise/Fall Time: | 0.3ns typical, 0.5ns max. @ 20% to 80% of PECL wave form |
| Start Up Time: | 3 ms typical; 10 ms max. |
| Tri-state Function Pin 1 (or 2): | If no connection or Vdd * 70% min is applied: Output. Internal pull-up Oscillation disable time is 2ms max. If Vdd* 30% max is applied: High impedance. 10µA typ., enable time 2ms max. |
| Phase Jitter (12 kHz to 20 MHz): | 200 fs typical |
| Phase Noise (62.5 MHz): | -50dBc/Hz @ 10Hz, -82dBc/Hz @ 100Hz, -116dBc/Hz @ 1kHz -138dBc/Hz @ 10kHz, -144dBc/Hz @ 100kHz, -149dBc/Hz @ 1MHz |
| Aging: | < ± 3ppm max. for the first year |
| Reflow Condition: | 260°C max for 10 sec. |

GERMANY:

COMTEC CRYSTALS GmbH · Sultenstrasse 12-14
8 5 5 8 6 P o i n g / G E R M A N Y
Phone +49 8121 778160 · Fax +49 8121 778177
e-Mail info@comtec-crystals.com
Internet: <http://www.comtec-crystals.com>
Subject to change without prior notice.



Technical Data and Graphics are all under
Copyright (c) of Comtec Crystals Group.

FRANCE:

COMTEC CRYSTALS SARL · 23, rue du Faucon
6 7 5 0 0 H a g u e n a u / F R A N C E
Phone +33 388 732162 · Fax +33 388 730118
e-Mail sales@comtec-crystals.com
Internet: <http://www.comtec-crystals.com>
sous réserve de modifications.