
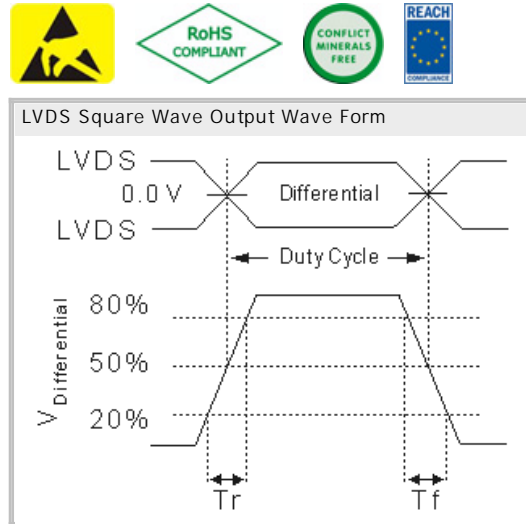


(VC) -Temperature Compensated Crystal Oscillator
 (VC) -TCXO(P) 3225DQN3.3 LVDS 3.3V 0.8pS Phase Jitter

- SMD in ceramic case (3.2 x 2.5 x 1.6) mm
- Tri-State Enable / Disable
- LVDS Differential
- on Tape & Reel
- RoHS conform; Lead-free product
- Vibration: MIL-STD-202F method 204, 35G, 50 to 2000 Hz
- Shock: MIL-STD-202F method 213B, test cond. E, 1000GG 1/2 sine wave
- Available in many standard and special frequencies

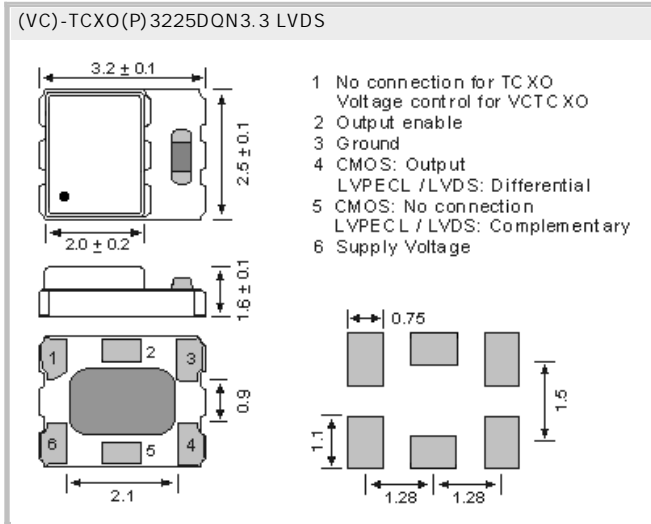

Specifications

Holder Type:	Voltage Control Temperature Compensated Crystal Oscillator , Type (VC)-TCXO(P)3225DQN3.3 LVDS 3.3V
Frequency Range:	10.0 MHz ~ 1.450 MHz
Initial Calibration Tolerance:	± 1.0 ppm max. at 25°C ± 2°C
Frequency Stability Codes (FSC):	
(FSC) Temperature (ref to + 25°C):	± 0.5 ppm; ± 2.5 ppm over -30+ 85°C; ± 1.0 ppm over -40+ 85°C (Inclusive Operating Temp., Supply Voltage, & Load)
(FSC) Aging:	± 1.0 ppm max. / year (max.)
(FSC) Voltage Change:	± 0.2 ppm max. , for a ± 5% input voltage change.
(FSC) Load Change:	± 0.2 ppm max. , for a ± 10% load condition change.
Power Supply Voltage (Vdd):	+ 3.3V D.C. ± 5% (voltage code " 3.3 ")
Output Symmetry (Duty Cycle):	45/55%
Start Up Time:	5 ms max.
Storage Temperature:	-55°C to +150°C
Maximum Supply Current:	156MHz : 25 mA ; 600MHz : 30 mA ; 800MHz : 32 mA; 1 GHz : 36 mA
Current with Output Disabled:	18 mA (typical)
SSB Phase Noise (Frequency 212.5 MHz):	-42dBc/Hz @ 10Hz, -87dBc/Hz @ 100Hz, -105dBc/Hz @ 1kHz -115dBc/Hz @ 10kHz, -118dBc/Hz @ 100kHz, -130dBc/Hz @ 1MHz, -151dBc/Hz @ 10MHz
Output Logic (VOH) (VOL):	1.4V typical, 1.6V max./ 1.1V typical, 0.9V min.
Control Voltage Function (CVF) Pad 1:	
(CVF) Linearity: ± 1% typical ± 10% max:	(CVF) Absolute Voltage: 4.0V max. // (CVF) Center+ Range: +1.5V ± 1.0V
(CVF) Transfer Function: Positive Transfer:	(CVF) Input Impedance: 770 K typical // (CVF) Harmonics: -5.0 dBc max.
(CVF) Frequency Pulling Range:	± 8ppm min.
Output Enable Funktion (OEF) Pad 2:	Output Enable Time/ Disable Time: 200nS max. / 50nS max.
(OEF) Integrated Phase Jitter:	0.8 pS typical (12 KHz to 20 MHz) ; < 150 fS (1.875 KHz to 21 MHz)
Rise/Fall Time (20% to 80% Vdd):	0.2 ns typical < 0.4 ns max. ; Tr/Tf: 20% <-> 80% wave form

GERMANY:

COMTEC CRYSTALS GmbH · Sultenstrasse 12-14
 8 5 5 8 6 P o i n g / G E R M A N Y
 Phone +49 8121 778160 · Fax +49 8121 778177
 e-Mail info@comtec-crystals.com
 Internet: <http://www.comtec-crystals.com>
 Subject to change without prior notice.



Technical Data and Graphics are all under
 Copyright (c) of Comtec Crystals Group.

FRANCE:

COMTEC CRYSTALS SARL · 23, rue du Faucon
 6 7 5 0 0 H a g u e n a u / F R A N C E
 Phone +33 388 732162 · Fax +33 388 730118
 e-Mail sales@comtec-crystals.com
 Internet: <http://www.comtec-crystals.com>
 Sous réserve de modifications.