



Clock Oscillator Differential CXP7050PQF2.5  
LVPECL 2.5V; ultra low jitter, with PLL

- SMD in ceramic case (7.0 x 5.0 x 1.8) mm
- Tri-State Enable / Disable on pad No. 1
- Fem to second integrated phase jitter (200 fs typical, 12 KHz to 20 MHz)
- High Q fundamental crystal + ultra low jitter multiplier circuit
- RoHS conform; Lead-free product; on Tape (16mm) & Reel
- Vibration: MIL-STD-202F method 204, 35G, 50 to 2000 Hz
- Shock: MIL-STD-202F method 213B, test cond. E, 1000GG 1/2 sine wave
- Available in many standard and special frequencies

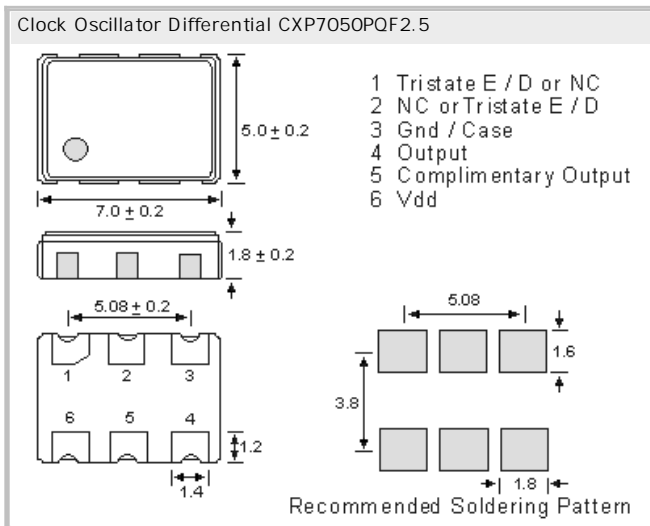

CMOS Output Wave Form

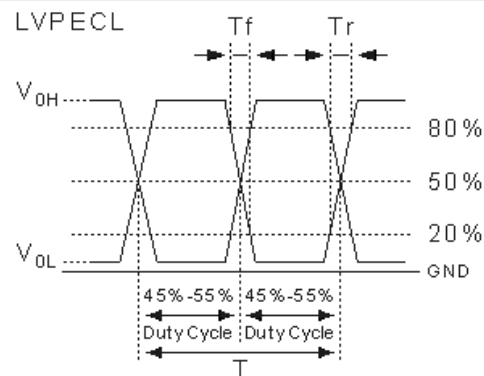

## Specifications

Holder Type:	CXP7050PQF2.5 ; 2.5V (Voltage code is "2.5"); Tri-State on pad 1
Frequency Range:	10 MHz to 1500.0 MHz
Frequency Stability at 25°C:	± 25 ppm / ± 50 ppm
Operating Temperature Range:	± 25 ppm, -40°C to +85°C / ± 50 ppm, -40°C to +85°C
Storage Temperature:	-55°C to +125°C
Power Supply Voltage (Vdd):	+ 2.5V D.C. ± 5%
Maximum Supply Current (Differential):	65mA max.
Current with Output:	16 mA typical
Output Voltage (VOH) (VOL):	High "1" Vdd-1.03V min, Vdd- 0.6Vmax. Low "0" Vdd-1.85V min, Vdd- 1.6Vmax.
Start Up Time:	10 ms max.
Output Symmetry (Duty Cycle):	50% ± 2% max. (measured at 50% Vdd)
Load:	Differential
Rise (Tr) /Fall Time (Tf):	0.2ns typical; 0.5ns max. (10% Vdd <-> 90% Vdd, 15pF load)
OE Function Pin 1:	-Enable: When 70% min. of VDD to Enable Output. (Open connection prohibit.) -Disable: When 30% max. of VDD to Disable Output. (high impedance).
Output Enable Time / Disable Time:	
Period Jitter:	1.0 ps typ. (12 kHz to 20 MHz); < 100 fs (1.875 MHz to 20MHz)
Phase Noise (156.250 MHz):	-67dBc/Hz @ 10Hz, -92dBc/Hz @ 100Hz, -112dBc/Hz @ 1kHz -121dBc/Hz @ 10kHz, -124dBc/Hz @ 100kHz, -136dBc/Hz @ 1MHz, -153dBc/Hz @ 5MHz
Aging:	< ± 2ppm max. for the first year; ± 10ppm max. over 10 years
Reflow Condition:	260°C max for 10 sec.

### GERMANY:

COMTEC CRYSTALS GmbH · Sultenstrasse 12-14  
8 5 5 8 6 P o i n g / G E R M A N Y  
Phone +49 8121 778160 · Fax +49 8121 778177  
e-Mail [info@comtec-crystals.com](mailto:info@comtec-crystals.com)  
Internet: <http://www.comtec-crystals.com>  
Subject to change without prior notice.



Technical Data and Graphics are all under  
Copyright (c) of Comtec Crystals Group.

### FRANCE:

COMTEC CRYSTALS SARL · 23, rue du Faucon  
6 7 5 0 0 H a g u e n a u / F R A N C E  
Phone +33 388 732162 · Fax +33 388 730118  
e-Mail [sales@comtec-crystals.com](mailto:sales@comtec-crystals.com)  
Internet: <http://www.comtec-crystals.com>  
Sous réserve de modifications.