
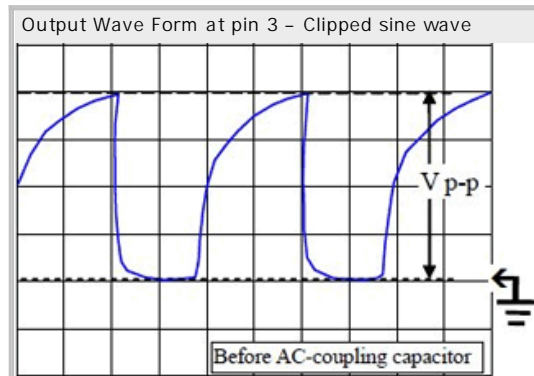


VC-TCXO-Oscillator SMD VC-TCXO3225CS3.3 3.3V  
Clipped Sine Wave I Wave form code is " CS "

- Voltage Control Temperature Compensated Crystal Oscillator
- SMD in ceramic case (3.2 x 2.5 x 1.3) mm on Tape & Reel
- Electrical Frequency Tuning (EFC) by external Control voltage
- RoHS conform; Lead-free product
- Vibration: MIL-STD-202F method 204, 35G, 50 to 2000 Hz
- Shock: MIL-STD-202F method 213B, test cond. E, 1000GG 1/2 sine wave
- Available in many standard and special frequencies

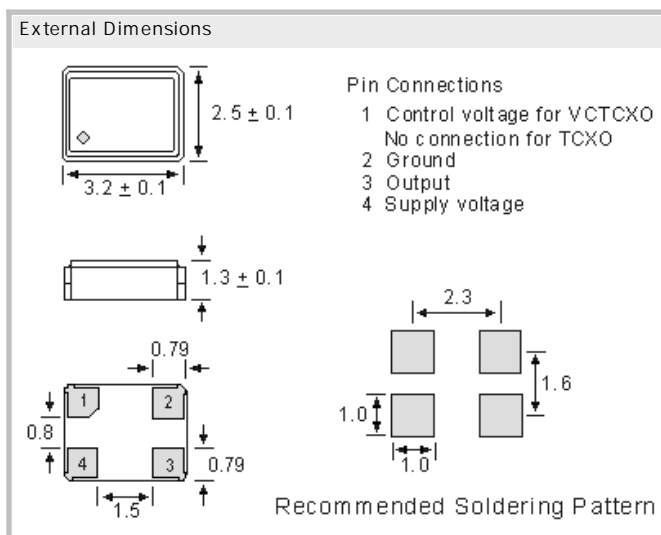

## Specifications - Product No. G040000000EQWVPN33JE

Holder Type:	VC-TCXO3225CS3.3 3.3V (Voltage code is " 3.3 ")
Frequency:	40.000000 MHz
Output Voltage Level (peak to peak):	0.8Vp-p (min.)
Output format:	DC coupled. Requires an external AC-Coupling capacitor at pin 3. 1000 pF is recommended.
Input Voltage:	+ 3.3V ± 5%
Frequency Stability:	± 1.0 ppm at 25°C
Freq. Stability vs Temperature:	± 1.0 ppm from -30°C to +85°C
Freq. Stability vs Aging:	± 1.0 ppm, first year at 25°C
Freq. Stability vs Voltage Change:	± 0.2 ppm max., for a ± 5% input voltage change
Freq. Stability vs Load Change:	± 0.2 ppm max., for a ± 10% load condition change
Operating Temperature Range:	-30°C to +85°C
Maximum Supply Current:	2.5 mA max.
Pin 1 VCTCXO only (EFC):	Standard +1.5V ± 1.0V for all input voltages. Deviation Range: ± 5.0 ppm ( min. ), Vcontrol = +1.5 V ± 1.0 V. Input Impedance: 1MΩ min.; Linearity ± 10% max. Modulation Bandwidth: 3kHz min. Measured at -3 dB
Start Up Time:	2 ms (typ.) ; 5ms (max.) (reach 90% amplitude and at +25°C ± 2°C)
Phase Noise (13MHz as example):	-80dBc/Hz at 10Hz offset, -115dBc/Hz at 100Hz offset -135dBc/Hz at 1kHz offset, -148dBc/Hz at 10kHz offset -148dBc/Hz at 100kHz offset
Storage Temperature:	-40°C to +85°C or -55 to +125°C (Package dependent)
Reflow Condition:	260°C max. for 10 sec.

### GERMANY:

COMTEC CRYSTALS GmbH · Sultenstrasse 12-14  
8 5 5 8 6 P o i n g / G E R M A N Y  
Phone +49 8121 778160 · Fax +49 8121 778177  
e-Mail [info@comtec-crystals.com](mailto:info@comtec-crystals.com)  
Internet: <http://www.comtec-crystals.com>  
Subject to change without prior notice.



Technical Data and Graphics are all under  
Copyright (c) of Comtec Crystals Group.

### FRANCE:

COMTEC CRYSTALS SARL · 23, rue du Faucon  
6 7 5 0 0 H a g u e n a u / F R A N C E  
Phone +33 388 732162 · Fax +33 388 730118  
e-Mail [sales@comtec-crystals.com](mailto:sales@comtec-crystals.com)  
Internet: <http://www.comtec-crystals.com>  
Sous réserve de modifications.