
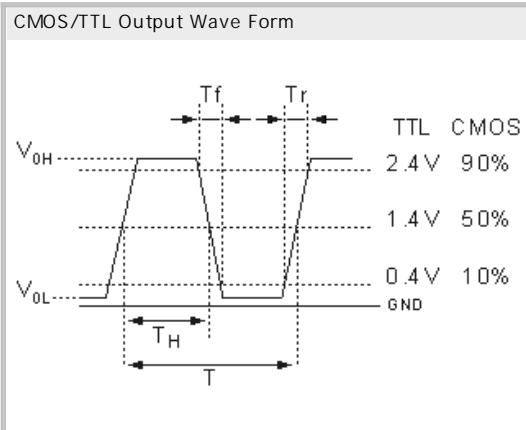


Programmable Crystal Clock Oscillator 3XP-22C
5.0V 1-133MHz, 3.3V 1-100MHz, 2.7V 1-66MHz

- Short lead time. From one day to one week
- Ultra compact metal package in DIL8
- CMOS/TTL Square Wave
- Available in many frequencies
- Packed in antistatic tubes
- RoHS conform; Lead-free product

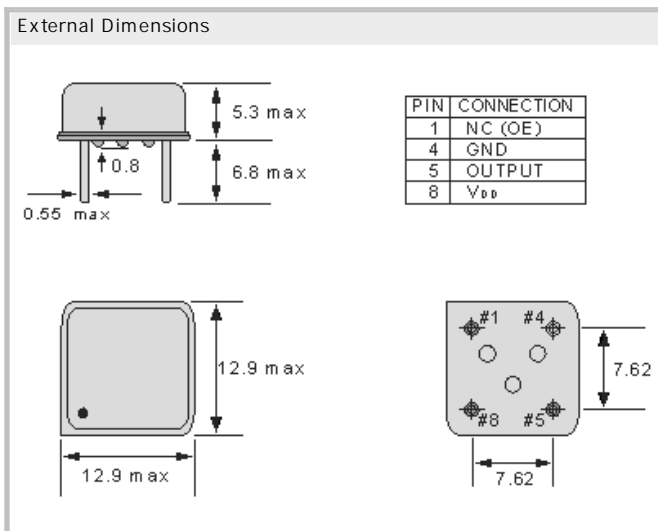

Specifications

Holder Type:	3XP-22C5 (5.0V), 3XP-22C3 (3.3V), 3XP-22C27 (2.7V)
Frequency Stability at 25°C:	± 25 ppm
Operating Temperature Range:	± 25 ppm, -40°C to +85°C (Inclusive Operating Temp., Supply Voltage, & Load)
Storage Temperature:	-55°C to +125°C
Power Supply Voltage (V _{DD}):	+ 5.5V max. to 2.7V min.
Maximum Supply Current:	4.5-5.5V V _{DD} -> 45mA max., 3.0-3.6V V _{DD} -> 25mA max., 2.5-3.0V V _{DD} -> 20mA max.
Standby Current:	10µA typical, 50µA max.
Output Load CL:	CL for TTL levels: 4.5V -5.5V V _{DD} 40 MHz 50pF; 40 - 133 MHz 25pF CL for CMOS levels: 4.5V -5.5V V _{DD} 60 MHz 50pF; 66 - 133 MHz 25pF 3.0V -3.6V V _{DD} 40 MHz 30pF; 40-100 MHz 15pF; 2.5V -3.0V V _{DD} 66 MHz
Output Symmetry (Duty Cycle):	40/60% or 45/55%
Output Voltage (V _{OH}) (V _{OL}):	90% of V _{DD} min. / 10% of V _{DD} max.
Rise/Fall Time (10% to 90% V _{DD}):	4 ns max. < 2.0 ns typical
Start Up Time:	10 ms max.
Tri-state (Option):	Pin 1 = H or open... Output active at pin 8 Pin 1 = L... high impedance at pin 8
Output Enable Time:	100 ns
RMS Jitter:	65ps typ.; 99ps max.
Aging:	< ± 5ppm max. / year (max.)

GERMANY:

COMTEC CRYSTALS GmbH · Sultenstrasse 12-14
8 5 5 8 6 P o i n g / G E R M A N Y
Phone +49 8121 778160 · Fax +49 8121 778177
e-Mail info@comtec-crystals.com
Internet: <http://www.comtec-crystals.com>
Subject to change without prior notice.



Technical Data and Graphics are all under
Copyright (c) of Comtec Crystals Group.

FRANCE:

COMTEC CRYSTALS SARL · 23, rue du Faucon
6 7 5 0 0 H a g u e n a u / F R A N C E
Phone +33 388 732162 · Fax +33 388 730118
e-Mail sales@comtec-crystals.com
Internet: <http://www.comtec-crystals.com>
Sous réserve de modifications.