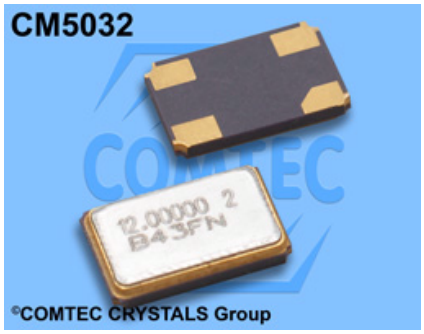

Quartz Crystal Unit CM5032-4pad HFF Series
High Frequency Fundamental SMD

- SMD in ceramic case (5.0 x 3.2 x 1.0) mm
- The whole package is grounded via the top metal lid and the two bottom pads.
- Available in many standard and special frequencies
- on Tape & Reel
- RoHS conform; Lead-free product
- Option: Tighter Tolerance, Tighter Stability, Extended Temperature

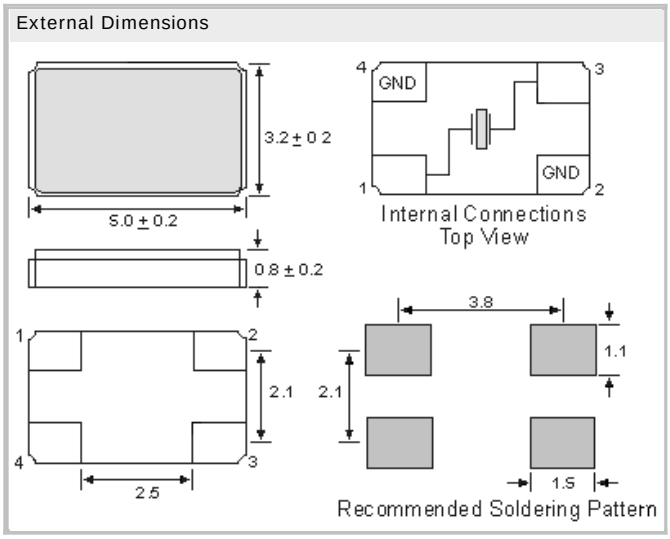

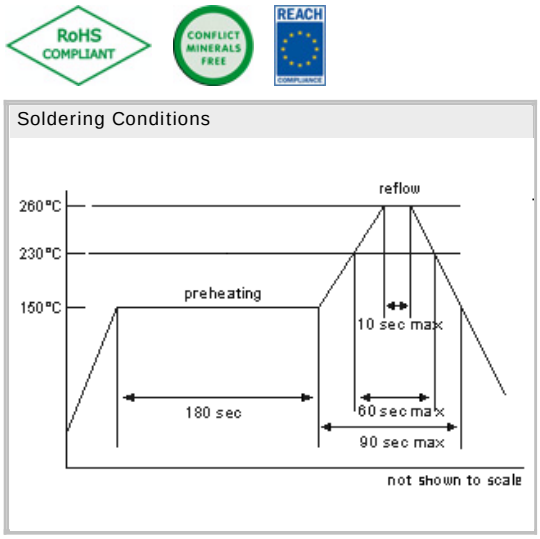

Specifications

Holder Type:	CM5032-4pad HFF Series
Frequency Range:	60.000 to 160.000 MHz (fun.) Inverted mesa blank inside
Stand. Frequency (Part list):	155.52 MHz, 156.250 MHz
Frequency Stability at 25°C:	±20 ppm
Temperature Stability:	±20 ppm @ 0°C to +70°C
Storage Temperature:	-50°C to +105°C
Drive Level:	< 100µW max.
Load Capacitance (CL):	Customer Specified
Crystal Cut & Vibration Mode:	AT-cut, fundamental;
Equivalent Series Resistance:	R = 50 Ohm (fun.)
Aging:	< ±3ppm max. / year (max.)

GERMANY:
COMTEC CRYSTALS GmbH · Sultenstrasse 12-14
85586 Poing / GERMANY
Phone +49 8121 778160 · Fax +49 8121 778177
e-Mail info@comtec-crystals.com
Internet: http://www.comtec-crystals.com
Subject to change without prior notice.

Technical Data and Graphics are all under Copyright (c) of Comtec Crystals Group.

FRANCE:
COMTEC CRYSTALS SARL · 23, rue du Faucon
67500 Haguenau / FRANCE
Phone +33 388 732162 · Fax +33 388 730118
e-Mail sales@comtec-crystals.com
Internet: http://www.comtec-crystals.com
Sous réserve de modifications.