
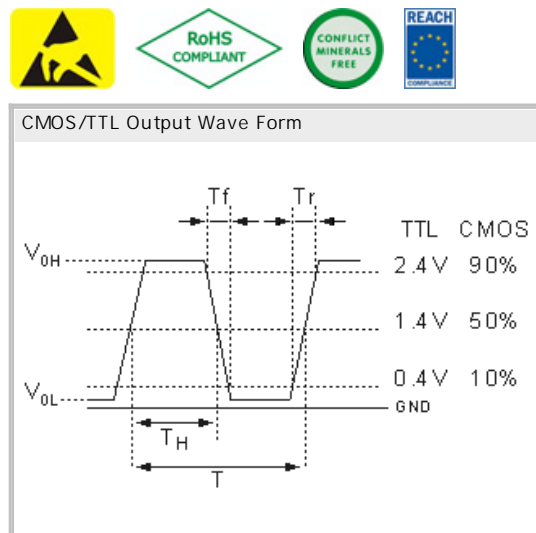


Crystal Clock Oscillator Wide Operating Temperature
CXO7050TN5.0 5.0V LVC MOS Over -55°C to +125°C

- SMD in ceramic case (7.0 x 5.0 x 1.7) mm
- Tri-State Enable / Disable
- LVC MOS Square Wave
- on Tape & Reel (Tape 16mm)
- RoHS conform; Lead-free product
- Vibration: MIL-STD-202F method 204, 35G, 50 to 2000 Hz
- Shock: MIL-STD-202F method 213B, test cond. E, 1000G 1/2 sine wave
- Available in many standard and special frequencies

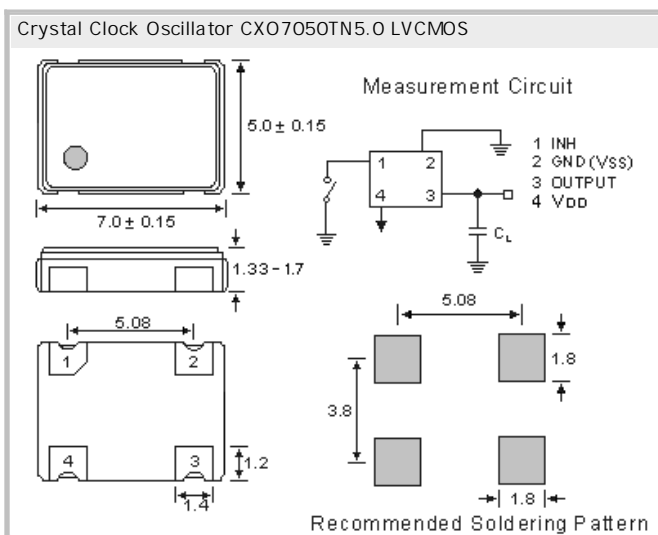

Specifications

Holder Type:	Crystal Clock Oscillator CXO7050TN5.0 5.0V CMOS/TTL
Frequency Range:	1.75 MHz ~ 60 MHz
Frequency Stability at 25°C:	± 50 to ± 100 ppm
Operating Temperature Range:	over -40°C to +125°C, 50ppm, 100ppm (Inclusive Operating Temp., Supply Voltage, & Load)
Storage Temperature:	-55°C to +125°C
Power Supply Voltage (Vdd):	+ 5.0V D.C. ± 10%
Maximum Supply Current:	8mA max. (1.75MHz ~ 20MHz) ; 8mA max. (20MHz ~ 60MHz)
Output Load:	15pF
Output Symmetry (Duty Cycle):	40/60% (45/55% optional)
Output Voltage (VOH) (VOL):	90% of Vdd min. / 10% of Vdd max.
Rise/Fall Time (10% to 90% Vdd):	10 ns max.
Start Up Time:	1.25 ~ 32.0 MHz : 5 ms (max.) ; 32.0 ~ 60.0 MHz : 10 ms (max.)
Tri-state Function Pin 1:	Pin 1 = H or open.... Output active at pin 3 Pin 1 = L.... high impedance at pin 3
Phase Jitter (12 kHz to 20 MHz):	150 fs (typical)
SSB Phase Noise:	-85dBc/Hz @ 10Hz, -115dBc/Hz @ 100Hz, -140dBc/Hz @ 1kHz -145dBc/Hz @ 10kHz, -150dBc/Hz @ 100kHz, -152dBc/Hz @ 1MHz
Aging:	< ± 2ppm max. for the first year (max.)
Reflow Condition:	260°C max. for 10 sec.

GERMANY:

COMTEC CRYSTALS GmbH · Sultenstrasse 12-14
8 5 5 8 6 P o i n g / G E R M A N Y
Phone +49 8121 778160 · Fax +49 8121 778177
e-Mail info@comtec-crystals.com
Internet: <http://www.comtec-crystals.com>
Subject to change without prior notice.



Technical Data and Graphics are all under
Copyright (c) of Comtec Crystals Group.

FRANCE:

COMTEC CRYSTALS SARL · 23, rue du Faucon
6 7 5 0 0 H a g u e n a u / F R A N C E
Phone +33 388 732162 · Fax +33 388 730118
e-Mail sales@comtec-crystals.com
Internet: <http://www.comtec-crystals.com>
sous réserve de modifications.